



PIX

Power Transmission Solutions

Driving growth!

PIX-Terminator® -HXS

Heavy-duty, Aramid-corded Banded Wrap Belts



www.pixtrans.com

Follow us @pixtrans



PIX-Terminator[®] -HXS

Heavy-duty, Aramid-corded Banded Wrap Belts

PIX-Terminator[®] is a latest evolution in power transmission technology with the help of special fabric aramid-corded Belts, for ultimate performance in every toughest application such as, mining, construction, forestry, agriculture and manufacturing.

PIX-Terminator[®] Belts are exclusively designed to offer unique solution for highly demanding requirements like extra heavy duty applications.

- › Drives with space constraints.
- › Drives where high power transmission is required.
- › Applications comprising of high shock loads which are caused due to sudden start / stop of the machine.
- › Drives with high ambient temperature conditions.
- › Drives with harsh working conditions.

Construction



1. Curved-top profile offers excellent lateral rigidity and protects the Belt from band separation.
2. Specially engineered high tensile-strength aramid cord provides excellent tensile strength and negligible Belt elongation.
3. The specially designed base compound provides excellent modulus strength, facilitating enhanced power transmission.
4. Specially woven unique outer fabric facilitates negligible slippage during operation, offers excellent flexibility, and reduces sidewall wear rate.

Lateral & Radial run-out test visuals



Features

- › Superior power transmission capacity - up to 70% more than the standard single Belts.
- › Especially treated outer tough cover fabric reduces sidewall wear rate and offers enhanced flexibility.
- › Top curvature profile and special fabric enhance the heat dissipation rate.
- › Controlled radial and lateral run-out facilitates smooth operation.
- › Special aramid cord for high tensile strength and minimum elongation.
- › Designed to exhibit excellent durability, strength, abrasion and wear resistance.
- › Best suited for heavy shock and impulse load drives.
- › Suitable for high power clutching drives.
- › Anti-static property complies to ISO 1813.
- › Extended temperature range: -25°C to +100°C.


Product range

Section	Top Width (mm)	Thickness (mm)	Angle (Degree)	Pitch (mm)	Mfg. Range		Length Desig.
					Min.	Max.	
TR-HB	17.0	13.5	40	19.0	50"	927"	Li
TR-HC	22.0	17.0	40	25.5	50"	927"	Li
TR-HSPA	13.0	12.0	40	15.0	1310 mm	4363 mm	Lp
TR-HSPB	17.0	17.0	40	19.0	1762 mm	10068 mm	Lp
TR-HSPC	22.0	22.5	40	25.5	1632 mm	23629 mm	Lp
TR-H3V	9.7	10.5	40	10.3	51.5"	172"	La
TR-H5V	15.8	16.5	40	17.5	52.5"	930"	La
TR-H8V	25.4	25.0	40	28.6	100"	931.5"	La

PIX-Terminator® -XS

Heavy-duty, Aramid-corded Wrap Belts

Construction

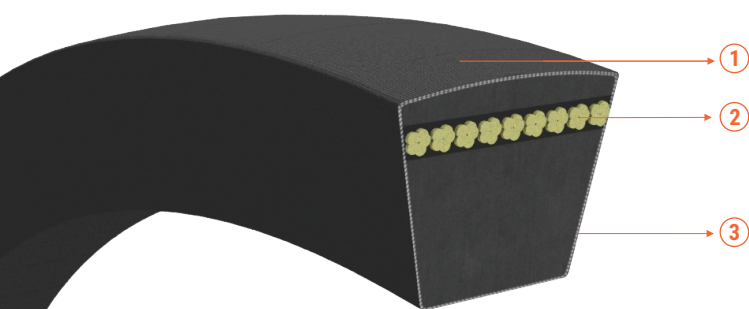

1. Specially treated outer cover fabric reduced sidewall wear rate and offers excellent flexibility.
2. Specially treated aramid tensile member provides extra strength & low belt stretch.
3. The fiber-filled specially designed compound provides excellent modulus which enables high power transmission.

Features

- › Superior power transmission capacity- Up to 55% more than the standard Belts
- › Especially treated outer tough fabric cover reduces sidewall wear rate and offers enhanced flexibility
- › Special fabric and design to enhance heat dissipation rate
- › Special aramid cords for high tensile strength and minimum elongation
- › Designed to exhibit excellent durability, strength, abrasion, and wear resistance
- › Superior performance under heavy shock and impulse loads
- › Extended temperature range: -25°C to +100°C

Product range


Section	Top Width (mm)	Thickness (mm)	Angle (Degree)	Min. Pulley Dia. (mm)	Mfg. Range		Length Desig.
					Min.	Max.	
TR-A	13.0	8.0	40	90	18"	256"	Li
TR-B	17.0	11.0	40	112	18"	927"	Li
TR-C	22.0	14.0	40	180	31"	927"	Li
TR-SPA	13.0	10.0	40	90	576 mm	9087 mm	Lp
TR-SPB	17.0	14.0	40	140	1000 mm	23606 mm	Lp
TR-SPC	22.0	18.0	40	224	1861 mm	23629 mm	Lp
TR-3V	9.7	8.0	40	63	19.5"	159"	La
TR-5V	15.8	13.5	40	140	47"	930"	La
TR-8V	25.4	23.0	40	335	100"	933"	La

Applications


Vibrating screens, reclaimers, pulverisers, heavy duty mixers, forestry woodcutters, wood chippers, surface miners, stackers, stone crushers, jaw crushers, cone crushers, ball-mills, etc.

Comparative charts


Power rating

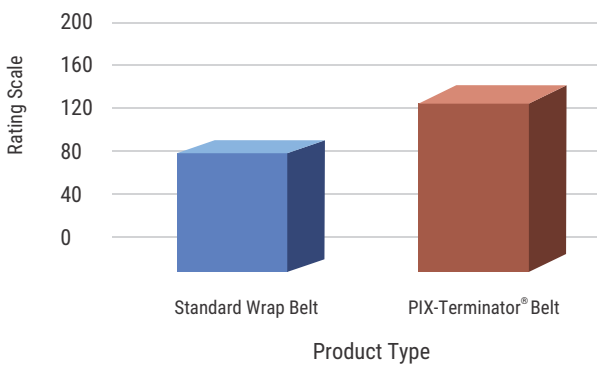

Product life rating

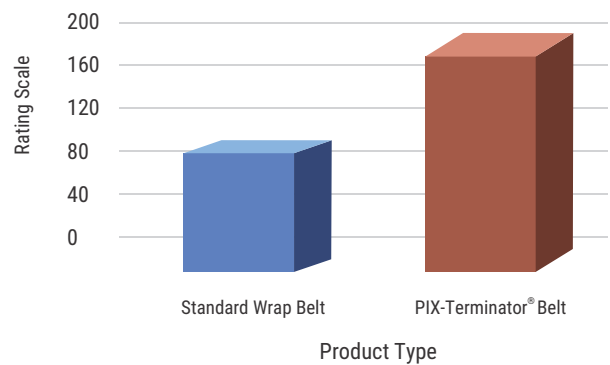

Slippage rating

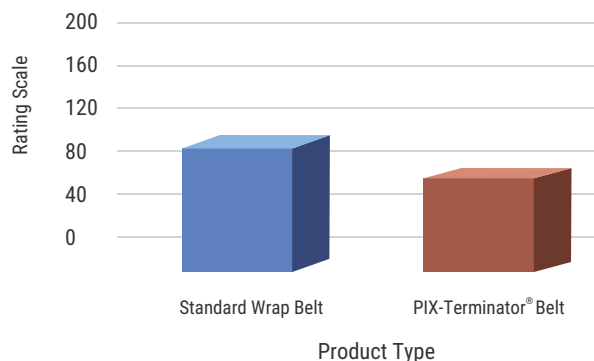

PIX-Terminator® -HXS

Product range - Banded Belts



HB		HB		HB		HB	
Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length
TR HB 50	50	TR-HB 89	89	TR-HB 117	117	TR-HB 235	235
TR HB 63	63	TR-HB 90	90	TR-HB 120	120	TR-HB 300	300
TR HB 72	72	TR-HB 92	92	TR-HB 124	124	TR-HB 355	355
TR HB 74	74	TR-HB 93	93	TR-HB 126	126	TR-HB 370	370
TR HB 76	76	TR-HB 94	94	TR-HB 128	128	TR-HB 390	390
TR HB 78	78	TR-HB 95	95	TR-HB 136	136	TR-HB 400	400
TR HB 79	79	TR-HB 96	96	TR-HB 140	140	TR-HB 450	450
TR HB 80	80	TR-HB 97	97	TR-HB 144	144	TR-HB 500	500
TR HB 83	83	TR-HB 98	98	TR-HB 148	148	TR-HB 535	535
TR HB 84	84	TR-HB 105	105	TR-HB 162	162	TR-HB 570	570
TR HB 86	86	TR-HB 112	112	TR-HB 195	195	TR-HB 600	600
TR HB 87	87	TR-HB 116	116	TR-HB 200	200	TR-HB 927	927

Inside length in inch


Intermediate sizes are available upon request



HC		HC		HC		HC	
Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length
TR-HC 50	50	TR-HC 128	128	TR-HC 190	190	TR-HC 435	435
TR-HC 68	68	TR-HC 132	132	TR-HC 195	195	TR-HC 475	475
TR-HC 75	75	TR-HC 136	136	TR-HC 210	210	TR-HC 500	500
TR-HC 80	80	TR-HC 140	140	TR-HC 225	225	TR-HC 550	550
TR-HC 90	90	TR-HC 142	142	TR-HC 238	238	TR-HC 600	600
TR-HC 94	94	TR-HC 146	146	TR-HC 240	240	TR-HC 625	625
TR-HC 98	98	TR-HC 148	148	TR-HC 285	285	TR-HC 645	645
TR-HC 108	108	TR-HC 150	150	TR-HC 300	300	TR-HC 660	660
TR-HC 110	110	TR-HC 154	154	TR-HC 360	360	TR-HC 690	690
TR-HC 114	114	TR-HC 158	158	TR-HC 375	375	TR-HC 927	927
TR-HC 120	120	TR-HC 160	160	TR-HC 385	385		
TR-HC 124	124	TR-HC 168	168	TR-HC 400	400		
TR-HC 126	126	TR-HC 180	180	TR-HC 415	415		

Inside length in inch

Intermediate sizes are available upon request




HSPA		HSPA		HSPA		HSPA	
Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length
TR-HSPA 1310	1310	TR-HSPA 1500	1500	TR-HSPA 1750	1750	TR-HSPA 1990	1990
TR-HSPA 1320	1320	TR-HSPA 1507	1507	TR-HSPA 1757	1757	TR-HSPA 2000	2000
TR-HSPA 1332	1332	TR-HSPA 1525	1525	TR-HSPA 1782	1782	TR-HSPA 2032	2032
TR-HSPA 1340	1340	TR-HSPA 1532	1532	TR-HSPA 1800	1800	TR-HSPA 2057	2057
TR-HSPA 1357	1357	TR-HSPA 1550	1550	TR-HSPA 1832	1832	TR-HSPA 2060	2060
TR-HSPA 1360	1360	TR-HSPA 1557	1557	TR-HSPA 1850	1850	TR-HSPA 2082	2082
TR-HSPA 1367	1367	TR-HSPA 1582	1582	TR-HSPA 1857	1857	TR-HSPA 2120	2120
TR-HSPA 1382	1382	TR-HSPA 1600	1600	TR-HSPA 1882	1882	TR-HSPA 2125	2125
TR-HSPA 1400	1400	TR-HSPA 1632	1632	TR-HSPA 1900	1900	TR-HSPA 2132	2132
TR-HSPA 1425	1425	TR-HSPA 1650	1650	TR-HSPA 1907	1907	TR-HSPA 2150	2150
TR-HSPA 1432	1432	TR-HSPA 1657	1657	TR-HSPA 1925	1925	TR-HSPA 2180	2180
TR-HSPA 1450	1450	TR-HSPA 1682	1682	TR-HSPA 1932	1932	TR-HSPA 2210	2210
TR-HSPA 1457	1457	TR-HSPA 1700	1700	TR-HSPA 1950	1950	TR-HSPA 2240	2240
TR-HSPA 1482	1482	TR-HSPA 1732	1732	TR-HSPA 1982	1982	TR-HSPA 2250	2250

Pitch length in mm

Intermediate sizes are available upon request

PIX-Terminator® -HXS


Product range - Banded Belts



HSPA		HSPA		HSPA		HSPA	
Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length
TR-HSPA 2282	2282	TR-HSPA 2350	2350	TR-HSPA 2430	2430	TR-HSPA 2500	2500
TR-HSPA 2300	2300	TR-HSPA 2360	2360	TR-HSPA 2480	2480	TR-HSPA 4439	4439
TR-HSPA 2332	2332	TR-HSPA 2380	2380	TR-HSPA 2490	2490	TR-HSPA 4363	4363

Pitch length in mm


Intermediate sizes are available upon request



HSPB		HSPB		HSPB		HSPB	
Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length
TR-HSPB 1762	1762	TR-HSPB 3350	3350	TR-HSPB 5120	5120	TR-HSPB 7000	7000
TR-HSPB 2100	2100	TR-HSPB 3400	3400	TR-HSPB 5300	5300	TR-HSPB 7115	7115
TR-HSPB 2240	2240	TR-HSPB 3500	3500	TR-HSPB 5265	5265	TR-HSPB 7250	7250
TR-HSPB 2300	2300	TR-HSPB 3550	3550	TR-HSPB 5500	5500	TR-HSPB 7440	7440
TR-HSPB 2310	2310	TR-HSPB 3670	3670	TR-HSPB 5600	5600	TR-HSPB 7500	7500
TR-HSPB 2360	2360	TR-HSPB 3750	3750	TR-HSPB 5665	5665	TR-HSPB 7580	7580
TR-HSPB 2500	2500	TR-HSPB 3800	3800	TR-HSPB 5750	5750	TR-HSPB 7620	7620
TR-HSPB 2650	2650	TR-HSPB 3900	3900	TR-HSPB 6000	6000	TR-HSPB 7750	7750
TR-HSPB 2800	2800	TR-HSPB 4000	4000	TR-HSPB 6300	6300	TR-HSPB 7830	7830
TR-HSPB 2840	2840	TR-HSPB 4010	4010	TR-HSPB 6375	6375	TR-HSPB 7905	7905
TR-HSPB 2855	2855	TR-HSPB 4200	4200	TR-HSPB 6390	6390	TR-HSPB 7965	7965
TR-HSPB 3000	3000	TR-HSPB 4250	4250	TR-HSPB 6430	6430	TR-HSPB 8000	8000
TR-HSPB 3080	3080	TR-HSPB 4400	4400	TR-HSPB 6500	6500	TR-HSPB 10068	10068
TR-HSPB 3150	3150	TR-HSPB 4500	4500	TR-HSPB 6685	6685		
TR-HSPB 3170	3170	TR-HSPB 4820	4820	TR-HSPB 6700	6700		
TR-HSPB 3250	3250	TR-HSPB 5000	5000	TR-HSPB 6845	6845		

Pitch length in mm

Intermediate sizes are available upon request




HSPC		HSPC		HSPC		HSPC	
Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length
TR-HSPC 1632	1632	TR-HSPC 4200	4200	TR-HSPC 6210	6210	TR-HSPC 8565	8565
TR-HSPC 3000	3000	TR-HSPC 4250	4250	TR-HSPC 6250	6250	TR-HSPC 8750	8750
TR-HSPC 3015	3015	TR-HSPC 4400	4400	TR-HSPC 6300	6300	TR-HSPC 9000	9000
TR-HSPC 3100	3100	TR-HSPC 4500	4500	TR-HSPC 6600	6600	TR-HSPC 9135	9135
TR-HSPC 3180	3180	TR-HSPC 4600	4600	TR-HSPC 6700	6700	TR-HSPC 9250	9250
TR-HSPC 3200	3200	TR-HSPC 4750	4750	TR-HSPC 7000	7000	TR-HSPC 9500	9500
TR-HSPC 3250	3250	TR-HSPC 5000	5000	TR-HSPC 7100	7100	TR-HSPC 9750	9750
TR-HSPC 3350	3350	TR-HSPC 5300	5300	TR-HSPC 7250	7250	TR-HSPC 9825	9825
TR-HSPC 3460	3460	TR-HSPC 5500	5500	TR-HSPC 7500	7500	TR-HSPC 10000	10000
TR-HSPC 3500	3500	TR-HSPC 5525	5525	TR-HSPC 7740	7740	TR-HSPC 10250	10250
TR-HSPC 3540	3540	TR-HSPC 5550	5550	TR-HSPC 8000	8000	TR-HSPC 10500	10500
TR-HSPC 3690	3690	TR-HSPC 5600	5600	TR-HSPC 8125	8125	TR-HSPC 10650	10650
TR-HSPC 3750	3750	TR-HSPC 5700	5700	TR-HSPC 8230	8230	TR-HSPC 10750	10750
TR-HSPC 3735	3735	TR-HSPC 5950	5950	TR-HSPC 8245	8245	TR-HSPC 10855	10855
TR-HSPC 3810	3810	TR-HSPC 6000	6000	TR-HSPC 8355	8355	TR-HSPC 11000	11000
TR-HSPC 3970	3970	TR-HSPC 6035	6035	TR-HSPC 8460	8460	TR-HSPC 11200	11200
TR-HSPC 4000	4000	TR-HSPC 6155	6155	TR-HSPC 8500	8500	TR-HSPC 23629	23629

Pitch length in mm

Intermediate sizes are available upon request

PIX-Terminator® -HXS


Product range - Banded Belts



H3V		H3V		H3V		H3V	
Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length
TR-H3V 515	51.5	TR-H3V 860	86	TR-H3V 1220	122	TR-H3V 1580	158
TR-H3V 530	53	TR-H3V 890	89	TR-H3V 1250	125	TR-H3V 1610	161
TR-H3V 560	56	TR-H3V 920	92	TR-H3V 1280	128	TR-H3V 1620	162
TR-H3V 590	59	TR-H3V 950	95	TR-H3V 1310	131	TR-H3V 1630	163
TR-H3V 620	62	TR-H3V 980	98	TR-H3V 1340	134	TR-H3V 1640	164
TR-H3V 650	65	TR-H3V 1010	101	TR-H3V 1370	137	TR-H3V 1660	166
TR-H3V 680	68	TR-H3V 1040	104	TR-H3V 1400	140	TR-H3V 1690	169
TR-H3V 710	71	TR-H3V 1070	107	TR-H3V 1430	143	TR-H3V 1700	170
TR-H3V 740	74	TR-H3V 1100	110	TR-H3V 1460	146	TR-H3V 1720	172
TR-H3V 770	77	TR-H3V 1130	113	TR-H3V 1490	149		
TR-H3V 800	80	TR-H3V 1160	116	TR-H3V 1520	152		
TR-H3V 830	83	TR-H3V 1190	119	TR-H3V 1550	155		

Outside length in Inches


Intermediate sizes are available upon request



H5V		H5V		H5V		H5V	
Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length
TR-H5V 525	52.5	TR-H5V 650	65	TR-H5V 780	78	TR-H5V 890	89
TR-H5V 530	53	TR-H5V 660	66	TR-H5V 790	79	TR-H5V 902	90.2
TR-H5V 540	54	TR-H5V 670	67	TR-H5V 800	80	TR-H5V 905	90.5
TR-H5V 550	55	TR-H5V 680	68	TR-H5V 810	81	TR-H5V 910	91
TR-H5V 560	56	TR-H5V 690	69	TR-H5V 820	82	TR-H5V 915	91.5
TR-H5V 570	57	TR-H5V 700	70	TR-H5V 830	83	TR-H5V 918	91.8
TR-H5V 580	58	TR-H5V 710	71	TR-H5V 840	84	TR-H5V 920	92
TR-H5V 590	59	TR-H5V 720	72	TR-H5V 850	85	TR-H5V 925	92.5
TR-H5V 600	60	TR-H5V 730	73	TR-H5V 860	86	TR-H5V 930	93
TR-H5V 610	61	TR-H5V 740	74	TR-H5V 870	87		
TR-H5V 620	62	TR-H5V 750	75	TR-H5V 875	87.5		
TR-H5V 630	63	TR-H5V 760	76	TR-H5V 880	88		
TR-H5V 640	64	TR-H5V 770	77	TR-H5V 885	88.5		

Outside length in Inches

Intermediate sizes are available upon request




H8V		H8V		H8V		H8V	
Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length
TR-H8V 1000	100	TR-H8V 3250	325	TR-H8V 5500	550	TR-H8V 7750	775
TR-H8V 1250	125	TR-H8V 3500	350	TR-H8V 5750	575	TR-H8V 8000	800
TR-H8V 1500	150	TR-H8V 3750	375	TR-H8V 6000	600	TR-H8V 8250	825
TR-H8V 1750	175	TR-H8V 4000	400	TR-H8V 6250	625	TR-H8V 8500	850
TR-H8V 2000	200	TR-H8V 4250	425	TR-H8V 6500	650	TR-H8V 8750	875
TR-H8V 2250	225	TR-H8V 4500	450	TR-H8V 6750	675	TR-H8V 9000	900
TR-H8V 2500	250	TR-H8V 4750	475	TR-H8V 7000	700	TR-H8V 9150	915
TR-H8V 2750	275	TR-H8V 5000	500	TR-H8V 7250	725	TR-H8V 9315	931.5
TR-H8V 3000	300	TR-H8V 5250	525	TR-H8V 7500	750		

Outside length in Inches

Intermediate sizes are available upon request

PIX-Terminator® -XS


Product range - Single Belts



A		A		A		A	
Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length
TR-A 18	18	TR-A 82	82	TR-A 148	148	TR-A 214	214
TR-A 22	22	TR-A 88	88	TR-A 154	154	TR-A 220	220
TR-A 28	28	TR-A 94	94	TR-A 160	160	TR-A 226	226
TR-A 34	34	TR-A 100	100	TR-A 166	166	TR-A 232	232
TR-A 40	40	TR-A 106	106	TR-A 172	172	TR-A 238	238
TR-A 46	46	TR-A 112	112	TR-A 178	178	TR-A 244	244
TR-A 52	52	TR-A 118	118	TR-A 184	184	TR-A 250	250
TR-A 58	58	TR-A 124	124	TR-A 190	190	TR-A 256	256
TR-A 64	64	TR-A 130	130	TR-A 196	196		
TR-A 70	70	TR-A 136	136	TR-A 202	202		
TR-A 76	76	TR-A 142	142	TR-A 208	208		

Inside length in inch

Intermediate sizes are available upon request




B		B		B		B	
Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length
TR-B 18	18	TR-B 248	248	TR-B 480	480	TR-B 712	712
TR-B 24	24	TR-B 256	256	TR-B 488	488	TR-B 720	720
TR-B 32	32	TR-B 264	264	TR-B 496	496	TR-B 728	728
TR-B 40	40	TR-B 272	272	TR-B 504	504	TR-B 736	736
TR-B 48	48	TR-B 280	280	TR-B 512	512	TR-B 744	744
TR-B 56	56	TR-B 288	288	TR-B 520	520	TR-B 752	752
TR-B 64	64	TR-B 296	296	TR-B 528	528	TR-B 760	760
TR-B 72	72	TR-B 304	304	TR-B 536	536	TR-B 768	768
TR-B 80	80	TR-B 312	312	TR-B 544	544	TR-B 776	776
TR-B 88	88	TR-B 320	320	TR-B 552	552	TR-B 784	784
TR-B 96	96	TR-B 328	328	TR-B 560	560	TR-B 792	792
TR-B 104	104	TR-B 336	336	TR-B 568	568	TR-B 800	800
TR-B 112	112	TR-B 344	344	TR-B 576	576	TR-B 808	808
TR-B 120	120	TR-B 352	352	TR-B 584	584	TR-B 816	816
TR-B 128	128	TR-B 360	360	TR-B 592	592	TR-B 824	824
TR-B 136	136	TR-B 368	368	TR-B 600	600	TR-B 832	832
TR-B 144	144	TR-B 376	376	TR-B 608	608	TR-B 840	840
TR-B 152	152	TR-B 384	384	TR-B 616	616	TR-B 848	848
TR-B 160	160	TR-B 392	392	TR-B 624	624	TR-B 856	856
TR-B 168	168	TR-B 400	400	TR-B 632	632	TR-B 864	864
TR-B 176	176	TR-B 408	408	TR-B 640	640	TR-B 872	872
TR-B 184	184	TR-B 416	416	TR-B 648	648	TR-B 880	880
TR-B 192	192	TR-B 424	424	TR-B 656	656	TR-B 888	888
TR-B 200	200	TR-B 432	432	TR-B 664	664	TR-B 896	896
TR-B 208	208	TR-B 440	440	TR-B 672	672	TR-B 904	904
TR-B 216	216	TR-B 448	448	TR-B 680	680	TR-B 912	912
TR-B 224	224	TR-B 456	456	TR-B 688	688	TR-B 927	927
TR-B 232	232	TR-B 464	464	TR-B 696	696		
TR-B 240	240	TR-B 472	472	TR-B 704	704		

Inside length in inch

Intermediate sizes are available upon request

PIX-Terminator® -XS


Product range - Single Belts



C		C		C		C	
Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length	Product Code	Inside Length
TR-C 31	31	TR-C 247	247	TR-C 463	463	TR-C 679	679
TR-C 39	39	TR-C 255	255	TR-C 471	471	TR-C 687	687
TR-C 47	47	TR-C 263	263	TR-C 479	479	TR-C 695	695
TR-C 55	55	TR-C 271	271	TR-C 487	487	TR-C 703	703
TR-C 63	63	TR-C 279	279	TR-C 495	495	TR-C 711	711
TR-C 71	71	TR-C 287	287	TR-C 503	503	TR-C 719	719
TR-C 79	79	TR-C 295	295	TR-C 511	511	TR-C 727	727
TR-C 87	87	TR-C 303	303	TR-C 519	519	TR-C 735	735
TR-C 95	95	TR-C 311	311	TR-C 527	527	TR-C 743	743
TR-C 103	103	TR-C 319	319	TR-C 535	535	TR-C 751	751
TR-C 111	111	TR-C 327	327	TR-C 543	543	TR-C 759	759
TR-C 119	119	TR-C 335	335	TR-C 551	551	TR-C 767	767
TR-C 127	127	TR-C 343	343	TR-C 559	559	TR-C 775	775
TR-C 135	135	TR-C 351	351	TR-C 567	567	TR-C 783	783
TR-C 143	143	TR-C 359	359	TR-C 575	575	TR-C 791	791
TR-C 151	151	TR-C 367	367	TR-C 583	583	TR-C 799	799
TR-C 159	159	TR-C 375	375	TR-C 591	591	TR-C 807	807
TR-C 167	167	TR-C 383	383	TR-C 599	599	TR-C 815	815
TR-C 175	175	TR-C 391	391	TR-C 607	607	TR-C 823	823
TR-C 183	183	TR-C 399	399	TR-C 615	615	TR-C 831	831
TR-C 191	191	TR-C 407	407	TR-C 623	623	TR-C 850	850
TR-C 199	199	TR-C 415	415	TR-C 631	631	TR-C 875	875
TR-C 207	207	TR-C 423	423	TR-C 639	639	TR-C 880	880
TR-C 215	215	TR-C 431	431	TR-C 647	647	TR-C 900	900
TR-C 223	223	TR-C 439	439	TR-C 655	655	TR-C 910	910
TR-C 231	231	TR-C 447	447	TR-C 663	663	TR-C 927	927
TR-C 239	239	TR-C 455	455	TR-C 671	671		

Inside length in inch

Intermediate sizes are available upon request




SPA		SPA		SPA		SPA	
Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length
TR-SPA 576	576	TR-SPA 3447	3447	TR-SPA 5526	5526	TR-SPA 7605	7605
TR-SPA 800	800	TR-SPA 3546	3546	TR-SPA 5625	5625	TR-SPA 7704	7704
TR-SPA 1012	1012	TR-SPA 3645	3645	TR-SPA 5724	5724	TR-SPA 7803	7803
TR-SPA 1665	1665	TR-SPA 3744	3744	TR-SPA 5823	5823	TR-SPA 7902	7902
TR-SPA 1764	1764	TR-SPA 3843	3843	TR-SPA 5922	5922	TR-SPA 8001	8001
TR-SPA 1863	1863	TR-SPA 3942	3942	TR-SPA 6021	6021	TR-SPA 8100	8100
TR-SPA 1962	1962	TR-SPA 4041	4041	TR-SPA 6120	6120	TR-SPA 8199	8199
TR-SPA 2061	2061	TR-SPA 4140	4140	TR-SPA 6219	6219	TR-SPA 8298	8298
TR-SPA 2160	2160	TR-SPA 4239	4239	TR-SPA 6318	6318	TR-SPA 8397	8397
TR-SPA 2259	2259	TR-SPA 4338	4338	TR-SPA 6417	6417	TR-SPA 8496	8496
TR-SPA 2358	2358	TR-SPA 4437	4437	TR-SPA 6516	6516	TR-SPA 8595	8595
TR-SPA 2457	2457	TR-SPA 4536	4536	TR-SPA 6615	6615	TR-SPA 8600	8600
TR-SPA 2556	2556	TR-SPA 4635	4635	TR-SPA 6714	6714	TR-SPA 8625	8625
TR-SPA 2655	2655	TR-SPA 4734	4734	TR-SPA 6813	6813	TR-SPA 8650	8650
TR-SPA 2754	2754	TR-SPA 4833	4833	TR-SPA 6912	6912	TR-SPA 8675	8675
TR-SPA 2853	2853	TR-SPA 4932	4932	TR-SPA 7011	7011	TR-SPA 8678	8678
TR-SPA 2952	2952	TR-SPA 5031	5031	TR-SPA 7110	7110	TR-SPA 8800	8800
TR-SPA 3051	3051	TR-SPA 5130	5130	TR-SPA 7209	7209	TR-SPA 8825	8825
TR-SPA 3150	3150	TR-SPA 5229	5229	TR-SPA 7308	7308	TR-SPA 9087	9087
TR-SPA 3249	3249	TR-SPA 5328	5328	TR-SPA 7407	7407		
TR-SPA 3348	3348	TR-SPA 5427	5427	TR-SPA 7506	7506		

Pitch length in mm

Intermediate sizes are available upon request

PIX-Terminator® -XS


Product range - Single Belts



SPB		SPB		SPB		SPB	
Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length
TR-SPB 1000	1000	TR-SPB 7460	7460	TR-SPB 13920	13920	TR-SPB 20380	20380
TR-SPB 1340	1340	TR-SPB 7800	7800	TR-SPB 14260	14260	TR-SPB 20720	20720
TR-SPB 1680	1680	TR-SPB 8140	8140	TR-SPB 14600	14600	TR-SPB 21060	21060
TR-SPB 2020	2020	TR-SPB 8480	8480	TR-SPB 14940	14940	TR-SPB 21400	21400
TR-SPB 2360	2360	TR-SPB 8820	8820	TR-SPB 15280	15280	TR-SPB 21740	21740
TR-SPB 2700	2700	TR-SPB 9160	9160	TR-SPB 15620	15620	TR-SPB 22080	22080
TR-SPB 3040	3040	TR-SPB 9500	9500	TR-SPB 15960	15960	TR-SPB 22420	22420
TR-SPB 3380	3380	TR-SPB 9840	9840	TR-SPB 16300	16300	TR-SPB 22760	22760
TR-SPB 3720	3720	TR-SPB 10180	10180	TR-SPB 16640	16640	TR-SPB 23100	23100
TR-SPB 4060	4060	TR-SPB 10520	10520	TR-SPB 16980	16980	TR-SPB 23450	23450
TR-SPB 4400	4400	TR-SPB 10860	10860	TR-SPB 17320	17320	TR-SPB 23475	23475
TR-SPB 4740	4740	TR-SPB 11200	11200	TR-SPB 17660	17660	TR-SPB 23500	23500
TR-SPB 5080	5080	TR-SPB 11540	11540	TR-SPB 18000	18000	TR-SPB 23575	23575
TR-SPB 5420	5420	TR-SPB 11880	11880	TR-SPB 18340	18340	TR-SPB 23606	23606
TR-SPB 5760	5760	TR-SPB 12220	12220	TR-SPB 18680	18680		
TR-SPB 6100	6100	TR-SPB 12560	12560	TR-SPB 19020	19020		
TR-SPB 6440	6440	TR-SPB 12900	12900	TR-SPB 19360	19360		
TR-SPB 6780	6780	TR-SPB 13240	13240	TR-SPB 19700	19700		
TR-SPB 7120	7120	TR-SPB 13580	13580	TR-SPB 20040	20040		

Pitch length in mm

Intermediate sizes are available upon request




SPC		SPC		SPC		SPC	
Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length	Product Code	Pitch Length
TR-SPC 1861	1861	TR-SPC 7243	7243	TR-SPC 12625	12625	TR-SPC 18007	18007
TR-SPC 2095	2095	TR-SPC 7477	7477	TR-SPC 12859	12859	TR-SPC 18241	18241
TR-SPC 2329	2329	TR-SPC 7711	7711	TR-SPC 13093	13093	TR-SPC 18475	18475
TR-SPC 2563	2563	TR-SPC 7945	7945	TR-SPC 13327	13327	TR-SPC 18709	18709
TR-SPC 2797	2797	TR-SPC 8179	8179	TR-SPC 13561	13561	TR-SPC 18943	18943
TR-SPC 3031	3031	TR-SPC 8413	8413	TR-SPC 13795	13795	TR-SPC 19177	19177
TR-SPC 3265	3265	TR-SPC 8647	8647	TR-SPC 14029	14029	TR-SPC 19411	19411
TR-SPC 3499	3499	TR-SPC 8881	8881	TR-SPC 14263	14263	TR-SPC 19645	19645
TR-SPC 3733	3733	TR-SPC 9115	9115	TR-SPC 14497	14497	TR-SPC 19879	19879
TR-SPC 3967	3967	TR-SPC 9349	9349	TR-SPC 14731	14731	TR-SPC 20113	20113
TR-SPC 4201	4201	TR-SPC 9583	9583	TR-SPC 14965	14965	TR-SPC 20347	20347
TR-SPC 4435	4435	TR-SPC 9817	9817	TR-SPC 15199	15199	TR-SPC 20581	20581
TR-SPC 4669	4669	TR-SPC 10051	10051	TR-SPC 15433	15433	TR-SPC 22000	22000
TR-SPC 4903	4903	TR-SPC 10285	10285	TR-SPC 15667	15667	TR-SPC 22500	22500
TR-SPC 5137	5137	TR-SPC 10519	10519	TR-SPC 15901	15901	TR-SPC 22800	22800
TR-SPC 5371	5371	TR-SPC 10753	10753	TR-SPC 16135	16135	TR-SPC 22900	22900
TR-SPC 5605	5605	TR-SPC 10987	10987	TR-SPC 16369	16369	TR-SPC 23000	23000
TR-SPC 5839	5839	TR-SPC 11221	11221	TR-SPC 16603	16603	TR-SPC 23629	23629
TR-SPC 6073	6073	TR-SPC 11455	11455	TR-SPC 16837	16837		
TR-SPC 6307	6307	TR-SPC 11689	11689	TR-SPC 17071	17071		
TR-SPC 6541	6541	TR-SPC 11923	11923	TR-SPC 17305	17305		
TR-SPC 6775	6775	TR-SPC 12157	12157	TR-SPC 17539	17539		
TR-SPC 7009	7009	TR-SPC 12391	12391	TR-SPC 17773	17773		

Pitch length in mm

Intermediate sizes are available upon request

PIX-Terminator® -XS


Product range - Single Belts



3V		3V		3V		3V	
Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length
TR-3V 195	19.5	TR-3V 560	56	TR-3V 950	95	TR-3V 1500	150
TR-3V 200	20	TR-3V 600	60	TR-3V 1000	100	TR-3V 1525	152.5
TR-3V 250	25	TR-3V 650	65	TR-3V 1200	120	TR-3V 1575	157.5
TR-3V 300	30	TR-3V 675	67.5	TR-3V 1250	125	TR-3V 1590	159
TR-3V 450	45	TR-3V 700	70	TR-3V 1300	130		
TR-3V 500	50	TR-3V 750	75	TR-3V 1325	132.5		

Outside length in Inches


Intermediate sizes are available upon request



5V		5V		5V		5V	
Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length
TR-5V 470	47	TR-5V 600	60	TR-5V 720	72	TR-5V 840	84
TR-5V 495	49.5	TR-5V 615	61.5	TR-5V 735	73.5	TR-5V 855	85.5
TR-5V 510	51	TR-5V 630	63	TR-5V 750	75	TR-5V 870	87
TR-5V 525	52.5	TR-5V 645	64.5	TR-5V 765	76.5	TR-5V 885	88.5
TR-5V 540	54	TR-5V 660	66	TR-5V 780	78	TR-5V 900	90
TR-5V 555	55.5	TR-5V 675	67.5	TR-5V 795	79.5	TR-5V 915	91.5
TR-5V 570	57	TR-5V 690	69	TR-5V 810	81	TR-5V 930	93
TR-5V 585	58.5	TR-5V 705	70.5	TR-5V 825	82.5		

Outside length in Inches

Intermediate sizes are available upon request



8V		8V		8V		8V	
Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length	Product Code	Outside Length
TR-8V 1000	100	TR-8V 2800	280	TR-8V 4600	460	TR-8V 6400	640
TR-8V 1300	130	TR-8V 3100	310	TR-8V 4900	490	TR-8V 7000	700
TR-8V 1600	160	TR-8V 3400	340	TR-8V 5200	520	TR-8V 7500	750
TR-8V 1900	190	TR-8V 3700	370	TR-8V 5500	550	TR-8V 9000	900
TR-8V 2200	220	TR-8V 4000	400	TR-8V 5800	580	TR-8V 9330	933
TR-8V 2500	250	TR-8V 4300	430	TR-8V 6100	610		

Outside length in Inches

Intermediate sizes are available upon request



5+
DECADES OF EXPERTISE
& EXPERIENCE



80K+
EXTENSIVE
PRODUCT RANGE



6
GLOBAL
LOCATIONS



100+
COUNTRIES
GLOBAL FOOTPRINT

ISO
9001:2015

IATF
16949:2016

ISO
14001:2015

ISO
45001:2018

Corporate Office



PIX Transmissions Ltd.

B-1208, 12th Floor, One BKC,
Bandra-Kurla, Complex Bandra (East),
Mumbai - 400051
Maharashtra, India

☎ +91-(0)-22-61383000
✉ info@pixtrans.com
🌐 www.pixtrans.com

Registered Office



PIX Transmissions Ltd.

J-7, M.I.D.C. Hingna Road,
Nagpur - 440016
Maharashtra, India

☎ +91-(0)-7104 669 000
✉ info@pixtrans.com
🌐 www.pixtrans.com

Overseas Offices



PIX Germany GmbH

Karl-Schurz-Str. 35
33100 Paderborn, Germany

☎ +49 (0) 5251-2844 070
☎ +49 (0) 5251-2844 099
✉ info@pixgermany.com
🌐 www.pixgermany.de



PIX Transmissions (Europe) Ltd.

12, Sterling Complex, Farthing
Road, Ipswich, Suffolk IP1 5AP
United Kingdom

☎ +44 (0) 1473-743 511
☎ +44 (0) 1473-742 227
✉ info@pixtranseu.com
🌐 www.pixtranseu.com



PIX Middle East Trading LLC

Warehouse No-7 & 9, Near RAK BANK,
Industrial Area-2. P.O. Box 238085,
Near UAE Exchange,
Al Qusais Ind-2, Dubai, U.A.E.

☎ +971-4-2345 100
☎ +971-4-2345 101
✉ info@pixme.ae
🌐 www.pixme.ae



PIX Middle East Trading LLC

Souq Al Ghazal Building,
Near Bin Thani Plaza, Deira,
P.O. Box 238085, Dubai, UAE

☎ +971-438-52128
✉ info@pixme.ae
🌐 www.pixme.ae